


SPUN ALUMINUM TALL CONES

PRODUCT INFORMATION

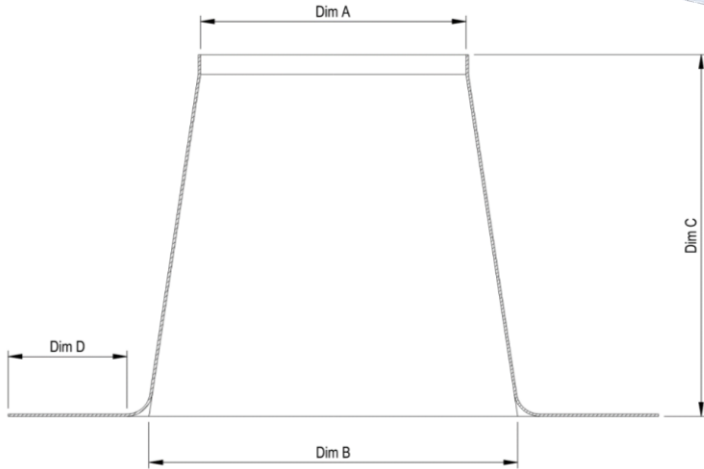

FEATURES:

- Constructed from Spun Aluminum cones without welded seams for enhanced durability
- Available in sizes:
 - 1 1/2", 2", 3", 4", 5", and 6" with a material thickness of 0.06 mm
 - 7", 8", 9", 10", 11" and 12" with a material thickness of 0.08 mm
 - 14", 16", 18", 20", 22", and 24" with a robust material thickness of 2 mm
- Made from premium grade 1060 Aluminum, ensuring higher quality and heavier gauge than most other brands
- Simple and easy to install, facilitating quick setup

OVERALL DIMENSIONS

SKU	SIZE	DIM. "A" TOP I.D.	DIM. "B" BOTTOM I.D.	DIM. "C" TOTAL HEIGHT	DIM. "D" FLANGE SIZE
P-80331	1.5"	1.5"	3.5"	8"	3.3"
P-80332	2"	2"	4"	8"	4"
P-80333	3"	3"	7"	12"	4"
P-80334	4"	4"	7.7"	12.4"	4.6"
P-80335	5"	5"	8.4"	12.2"	4.4"
P-80310	6"	6"	9.5"	12.2"	4.3"
P-80337W	7"	7"	10.5"	12"	4"
P-80338	8"	8"	11.8"	12.6"	4"
P-80339W	9"	9"	12.5"	12.25"	4"
P-80340	10"	10"	13.5"	12"	3.7"
P-80351	11"	11"	14.5"	12"	4"
P-80341	12"	12"	15.5"	11"	4.1"
P-13214	14 1/4"	14.25"	18"	11"	4"
P-13216	16 1/4"	16.25"	19.75"	11"	4"
P-13218	18 1/4"	18.25"	22"	11"	4"
P-13220	20 1/4"	20.25"	28"	12.8"	4.7"
P-13222	22"	22"	28"	12.8"	4.7"
P-13224	24 1/4"	24.25"	28"	11"	4"

APPLICATION:

Spun Aluminum tall cones are used to provide a durable and watertight seal around roof penetrations, such as vent pipes or stacks. They offer protection from weather elements and are designed to accommodate taller cone collars, ensuring long-lasting performance and preventing leaks.

There is no equal to **PLATINUM!**